


LE-37P

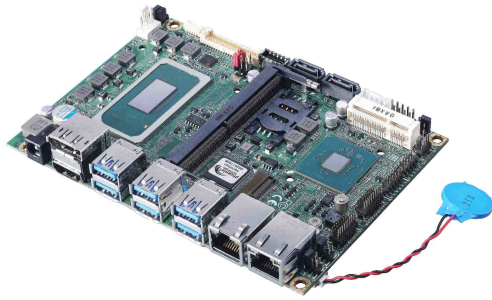

Features

- Onboard Tiger Lake /11th Gen H Processor
- 1 x DDR4 SO-DIMM 3200 MHz up to 32GB
- Integrated DisplayPort, HDMI, LVDS for Triple display support
- 1 x Intel® Gigabit PHY LAN, 1 x Intel® 2.5 Gigabit LAN
- 2 x SATA3, 4 x COM, 1 x SIM Slot
- 6 x USB3.2 Gen2, 1 x USB3.2 Gen2 (Type E), 2 x USB2.0
- 1 x MiniPCIe, support mSATA
- 1 x M.2 2230 Key E for Wi-Fi and Bluetooth
- 1 x M.2 2280 Key M support PCIe Gen4 and SATA
- 1 x M.2 2280 Key M support PCIe Gen4
- Support Watchdog Timer, 4K resolution
- DC Jack 9~35V

System

| | |
|-----------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Processor | Tiger Lake /11 th Gen H Processor FCBGA1787 package |
| Chipset | Intel® QM580E / RM590E (TGL-H Xeon CPUs have to use RM590E) |
| Memory | 1 x DDR4 SO-DIMM 3200 MHz up to 32GB, Support Non-ECC, unbuffered memory only (TGL-H Xeon CPUs can support ECC memory) |
| Watchdog Timer | Generates a system reset with internal timer for 1 min/s ~ 255 min/s |
| Real Time Clock | Chipset integrated RTC with onboard lithium battery |
| Expansion | 1 x MiniPCIe with SIM Slot (support mSATA) 1 x M.2 2280 Key M support PCIe Gen4 and SATA 1 x M.2 2280 Key M support PCIe Gen4 1 x M.2 2230 Key E for Wi-Fi and Bluetooth |

Graphics

| | |
|-------------------|-----------------------------------------------------|
| Chipset | Intel® 11th Gen integrated UHD Graphics |
| Display Interface | 1 x LVDS (Note1), 1 x HDMI, 1 x DisplayPort (Note2) |

Ordering Code

| | |
|---------|-----------------------------------------------------------|
| LE-37P7 | With Core™ i7-11850HE, QM580E, Cooler Fan, HDMI, DP, LVDS |
| M2-3502 | M2 2280 Key M support 2 x Gigabit LAN |
| M2-3504 | M2 2280 Key M support 4 x Gigabit LAN |

Note1: Onboard 18/24-bit single/dual channel +3.3V/ +5V/ +12V LVDS

Note2: Add ADP-3355 supports VGA or Add ADP-3460 supports 2nd LVDS, please contact with our sales for OEM version.

Note3: W-11865MRE, W-11555MRE, W-11155MRE can operate within -40°C~85°C

OEM

| | |
|-----------|-----------------------------------------------------------|
| LE-37P5 | With Core™ i5-11500HE, QM580E, Cooler Fan, HDMI, DP, LVDS |
| LE-37P3 | With Core™ i3-11100HE, QM580E, Cooler Fan, HDMI, DP, LVDS |
| LE-37PC | With Celeron® 6600HE, QM580E, Cooler Fan, HDMI, DP, LVDS |
| LE-37PW7R | With Xeon® W-11865MRE, RM590E, Cooler Fan, HDMI, DP, LVDS |
| LE-37PW7L | With Xeon® W-11865MLE, RM590E, Cooler Fan, HDMI, DP, LVDS |
| LE-37PW5R | With Xeon® W-11555MRE, RM590E, Cooler Fan, HDMI, DP, LVDS |
| LE-37PW5L | With Xeon® W-11555MLE, RM590E, Cooler Fan, HDMI, DP, LVDS |
| LE-37PW3R | With Xeon® W-11155MRE, RM590E Cooler Fan, HDMI, DP, LVDS |
| LE-37PW3L | With Xeon® W-11155MLE, RM590E, Cooler Fan, HDMI, DP, LVDS |
| ADP-3355 | DisplayPort to VGA module (For VGA) |
| ADP-3460 | DisplayPort to LVDS module (For 2nd LVDS) |

LAN

| | |
|------|----------------------------------------------------------|
| Chip | 1 x Intel® I219-LM Gigabit PHY LAN (Support iAMT15.0) |
| | 1 x Intel® I225-LM Gigabit LAN |

I/O

| | |
|--------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Serial ATA | 2 x SATA3 |
| Audio | Realtek ALC888S HD Audio |
| Internal I/O | 2 x SATA3, 2 x RS232, 2 x RS232/RS422/RS485 2 x USB2.0, 1 x Audio, 1 x SMBus, 1 x GPIO 1 x USB3.2 Gen2 (Type E), 1 x LVDS, 1 x LCD inverter connector, , |
| Rear I/O | 1 x HDMI, 1 x DisplayPort, 2 x LAN, 6 x USB3.2 Gen2, 1 x DC Jack |

Mechanical & Environmental

| | |
|-------------------|-----------------------------------------------------------------------------------------|
| Power Requirement | DC Jack 9~35V |
| Size | 146mm x 101mm (L x W) |
| Temperature | Operating within 0°C~60°C (32°F~140°F)(Note3) Storage within -20°C~80°C (-4°F~176°F) |
| Relative Humidity | 10%~90%, non-condensing |