

M2-225/N

M.2(NGFF) 2.5 Gigabit Ethernet Card

User's Manual

Edition 1.11

2025/01/08



Packing List:


Please check the package content before you starting using the card.



1 x M2-225 card



**1 x Adapter LAN Cable
(OALGLAN-A-20 / 1040617)**

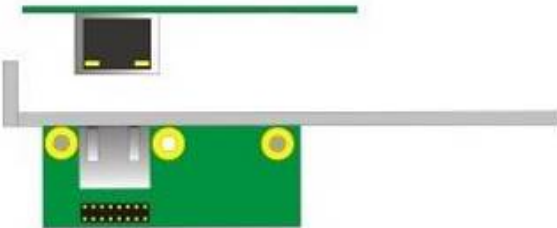

**1 x LAN Adapter
(BADPGLAND_A / 4120007011)
(Include Bracket)**

Index

1 <Product Specifications>	3
2 <Block Diagram>	4
3 <Pin-out Definition>	5
4 <Component Placement>	7
4.1 < Connector Reference >	7
4.2 < LAN Adapter >	8
4.3 < Cable connection >	9
5 <Mechanical Drawing>	10
Contact information	12

1 <Product Specifications>

Product Description

Host Interface	M.2
Controller	Intel® Ethernet Controller I225 / I226
M.2 key type	A-E key PCIe interface
Dimension	22mm x 30mm x 7mm


Operating Conditions

Voltage	3.3V +/-5%
Temperature	0~55°C
Storage Temperature	-40~+85°C

General Specifications

Compliance	IEEE 802.3 Ethernet interface for 2500BASE-T 1000BASE-T, 100BASE-TX, and 10BASE-T applications (802.3, 802.3u, 802.3ab).
Transfer Rate	2500 Mb/s, 1000 Mb/s, 100 Mb/s, or 10 Mb/s
Support OS	Win10 RS5+ x64, Linux kernel 5.7

2 <Block Diagram>

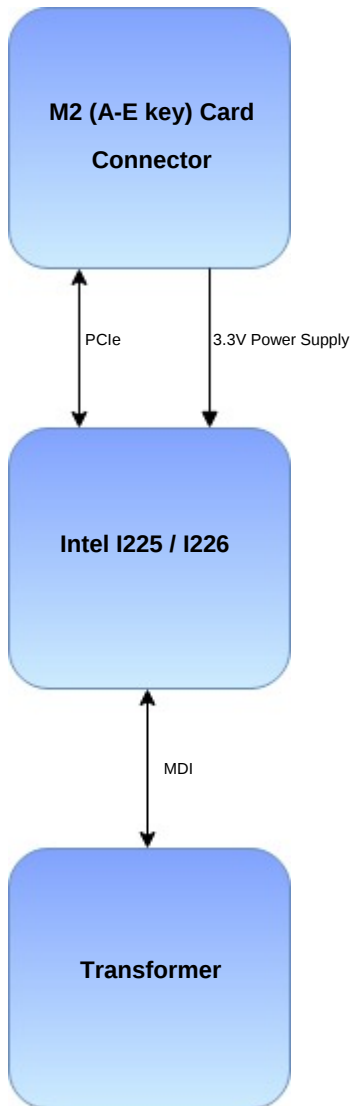


3 <Pin-out Definition>

Pin No.	Definition	Definition	Pin No.
1	GND		
3	NC	3.3V	2
5	NC	3.3V	4
7	GND	NC	6
	Key A	Key A	
	Key A	Key A	
	Key A	Key A	
	Key A	Key A	
17	NC	NC	16
19	NC	GND	18
21	NC	NC	20
23	NC	NC	22
	Key E	Key E	
	Key E	Key E	
	Key E	Key E	
	Key E	Key E	
33	GND	NC	32
35	PERp0	NC	34
37	PERn0	NC	36
39	GND	NC	38
41	PETp0	NC	40
43	PETn0	NC	42
45	GND	NC	44
47	REFCLKp0	NC	46
49	REFCLKn0	NC	48
51	GND	NC	50
53	CLKREQ0#	PERST0#	52
55	PEWAKE0#	NC	54
57	GND	NC	56
59	NC	NC	58

Pin No.	Definition	Definition	Pin No.
61	NC	NC	60
63	GND	NC	62
65	NC	NC	64
67	NC	NC	66
69	GND	NC	68
71	NC	NC	70
73	NC	3.3V	72
75	GND	3.3V	74

4 <Component Placement>

4.1 < Connector Reference >

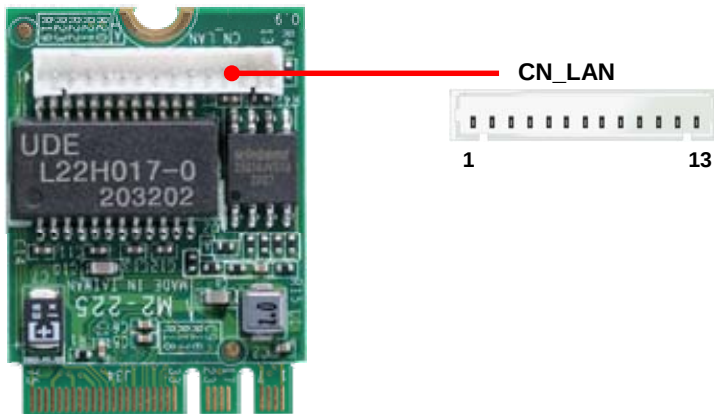

Connector: CN_LAN


Connector Type:

13-pin (13 x 1), pitch: 1.25 mm, DIP type

Straight P.C.B Connector

Pin	Description	Pin	Description
1	RTD00+	9	GND
2	RTD00-	10	RLINK2.5G0-
3	RTD01+	11	RLINK1G0-
4	RTD01-	12	RLINK0-
5	RTD02+	13	RACTLED0-
6	RTD02-		
7	RTD03+		
8	RTD03-		

4.2 < LAN Adapter >

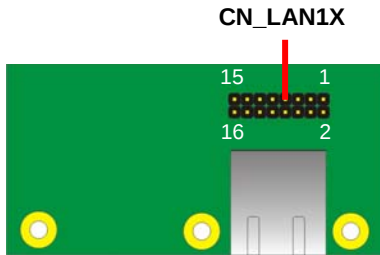


(Include Bracket)



CN_LAN1X:

Connector Type:


16-pin (8 x 2) 2.0 x 2.0 mm Straight Type Header



Pin	Description	Pin	Description
1	RTD0+	2	RTD1+
3	RTD0-	4	RTD1-
5	NC	6	GND
7	RTD2+	8	RTD3+
9	RTD2-	10	RTD3-
11	GND	12	GND
13	LINK1	14	Link100
15	ACTLED1	16	Link1000

Adapter LAN Connector: RJ45_1

RJ45 connector




2500 Mb/s: Orange

10/100/1000 Mb/s: Green

Pin	1	2	3	4	5	6	7	8
Description	MDI0+	MDI0-	MDI1+	MDI2+	MDI2-	MDI1-	MDI3+	MDI3-

4.3 < Cable connection >

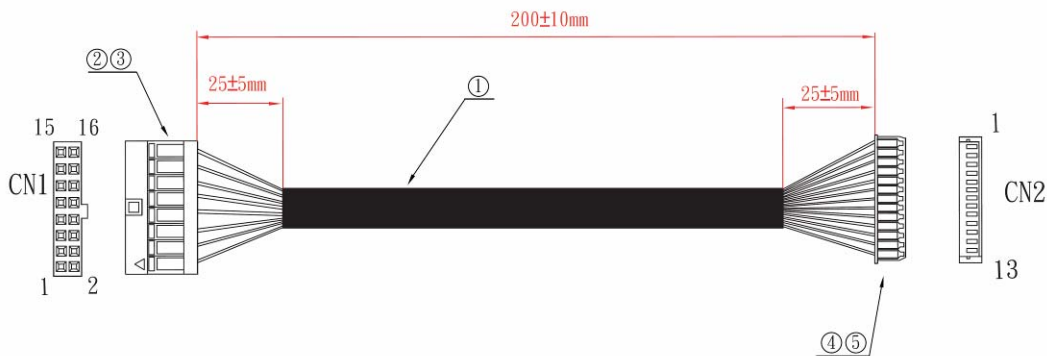


CN1	CN2	CN1	CN2
1	1	12	9
3	2	16	10
2	3	14	11
4	4	15	12
7	5	13	13
9	6		
8	7		
10	8		


NO	DESCRIPTION	COLOR	Q' TY	UNIT
1	UL1571 28AWG		13	PCS
2	HOUSING DP2.0 2*8P	BLACK	1	PCS
3	TERMINAL DP2.0		13	PCS
4	HOUSING MOLEX1.25 13PIN	WHITE	1	PCS
5	TERMINAL MOLEX 1.25		13	PCS


5 <Mechanical Drawing>

M2-225/N: (Units: mm)

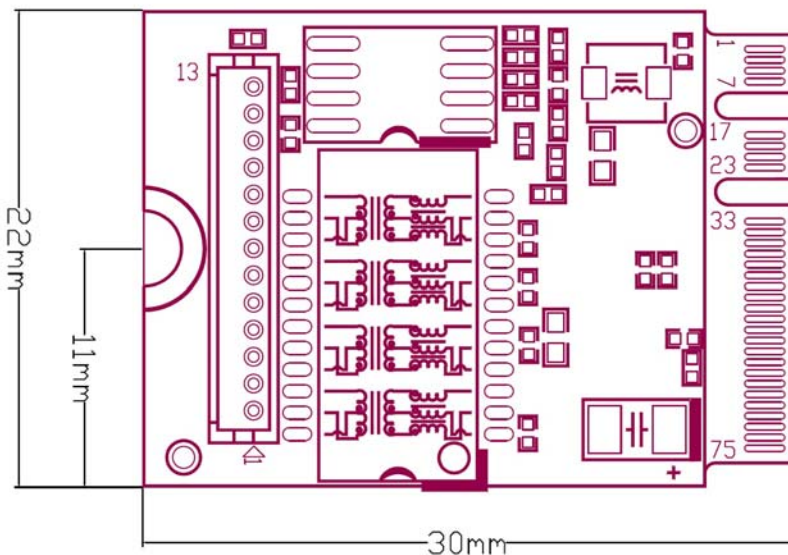



LAN Adapter: (Units: inch)

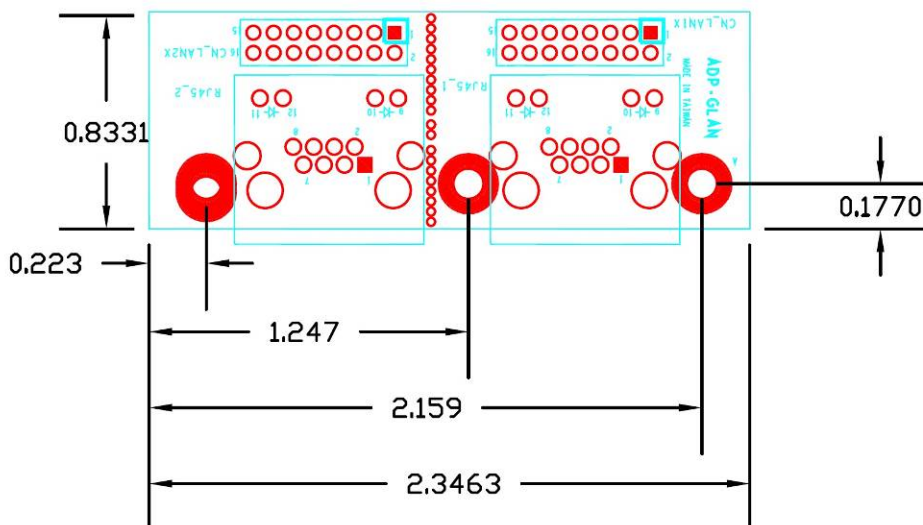

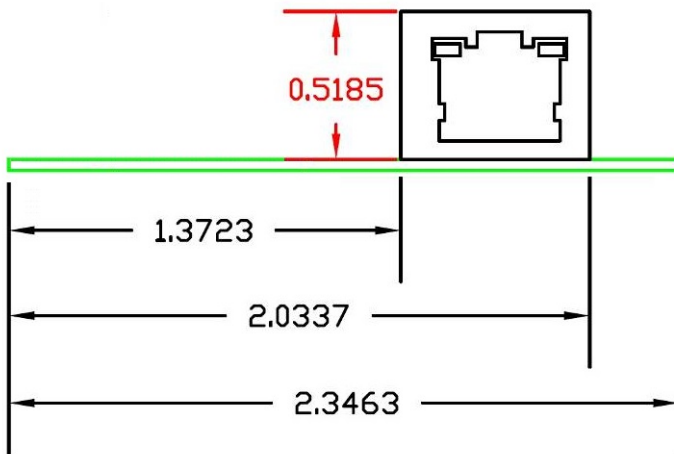

Bracket: (Units: mm)

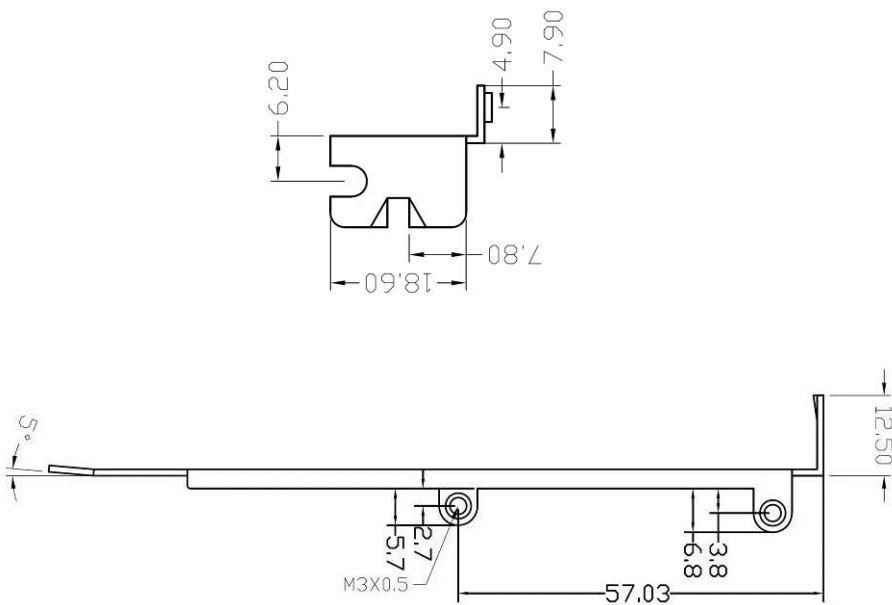

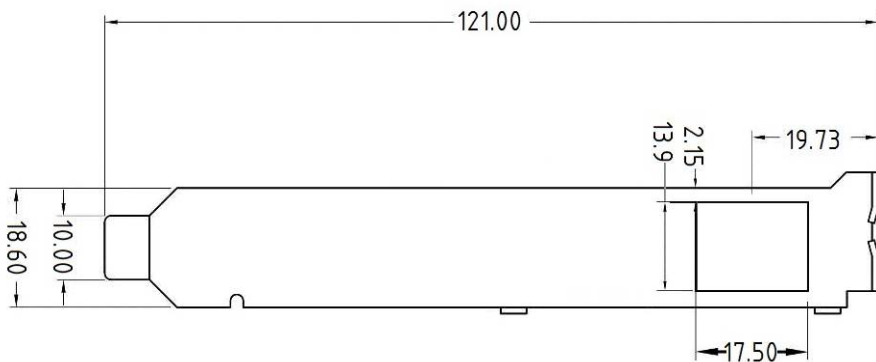

Contact information

Any advice or comment about our products and service, or anything we can help you please don't hesitate to contact with us. We will do our best to support you for your products, projects and business.

Taiwan Commate Computer Inc.

Address	19F., NO.94, Sec. 1, Xintai 5 th Rd., Xizhi Dist., New Taipei City 22102, Taiwan.
TEL	+886-2-26963909
Website	www.commell.com.tw
E-mail	info@commell.com.tw (General information) tech@commell.com.tw (Technical Support)